


Mark 15电磁阀

- 直动式阀
- 插入式电磁线圈带指示灯
- 5/2通, 5/3通
- 精密配合的阀芯阀套组件
- 流量系数CV到1.5
- 接管口径: 1/4和3/8NPTF或G牙;
- 可用于润滑或无润滑系统
- 可搭配迭加式调压阀和速度控制模块
- 积木式汇流板系统

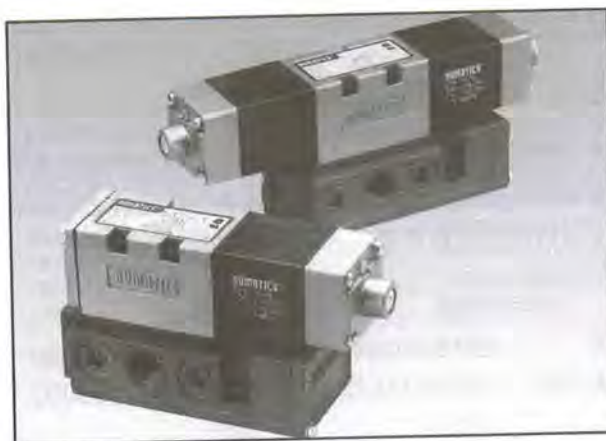

技术规格

规格	NPTF		G牙	
CV:	1/4=1.4	3/8=1.5	1/4=1.4	3/8=1.5
流量: l/min	1379	1477	1379	1477
使用压力范围:	-1-10bar			
温度范围:	-23°C~46°C环境温度			





电气规格

所有线圈连续负载	12 VDC	24 VDC	24 V AC 50 Hz.	24 V AC 60 Hz.	115 V AC 50 Hz	120 V AC 60 Hz	230 V AC 50 Hz	240 V AC 60 Hz
功率(W)	6.0	6.0	—	—	—	—	—	—
保持电流(A)	0.50	0.250	0.59	0.42	0.11	0.09	0.07	0.05
瞬间电流(A)	—	—	2.85	2.53	0.63	0.58	0.31	0.29
启动时间(S)	2位, 单电控, 弹簧复位	0.038	0.034	0.010	0.010	0.010	0.010	0.010
	2位, 双电控, 机械锁位	0.035	0.035	0.010	0.010	0.010	0.010	0.010
	3位, 弹簧对中	0.040	0.040	0.010	0.010	0.010	0.010	0.010
复位时间(S)	2位, 单电控, 弹簧复位	0.016	0.011	0.015	0.015	0.015	0.015	0.015
	2位, 双电控, 机械锁位	—	—	—	—	—	—	—
	3位, 弹簧对中	0.010	0.010	0.012	0.012	0.012	0.012	0.012

订货指南:

152	SA	4	3A	M	G	000	61
型式及接口 152=1/4 (单购阀体型式) 153=3/8	阀机能 4=5/2 5=5/3 中位开放 6=5/3 中位闭气	安装方式 00=单独阀体 01=阀体带调速模块 15=阀体带汇流板 25=汇流板15带调速阀 3A=阀体带底座, 侧接口 3C=底座3A带调速阀	接线方式 2=DIN插头, 标准AC 4=DIN插头, 标准DC 6=2带指示灯, 仅AC K=直接出线式, 标准AC带指示灯 M=直接出线式, 标准DC带指示灯	特别选型 000=无选型 11B=线圈带锁定装置 12B=电磁阀无油组装	电压 20=24VAC 30=120VAC 40=220VAC 60=12VDC 61=24VDC		
阀型式 SA=单电控直动阀 弹簧复位 SS=双电控直动阀				螺纹型式 0=单购阀体或NPTF G=G牙			

阀机能 (型号为单购阀体型号)



Mark 15 阀与底座尺寸

IS2SA4 单电控直动阀





IS2SS4, 5, 6 双电控直动阀 (如虚线所示)

接口口径: 底座 1/4 或 3/8NPTF 或 G 牙

1/2NPTF 电缆接口

3/8NPTF 公共排气口

尺寸	
A	43.7
B	19.8
C	7.9
D	21.3
E	11.9
F	18.3
G	5.2
H	22.4
I	44.4
J	82.5
K AC	107
K DC	126
L AC	156
L DC	174
M AC	214
M DC	251
N	44.7
O	23
P	1.6
Q	54.8
R	39.6
S	62.7
T	83.8
U	25.4
V	130
W	9.5
X	7.9
Y	19.8

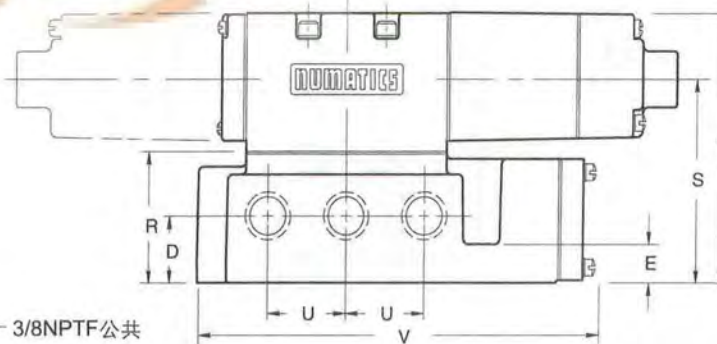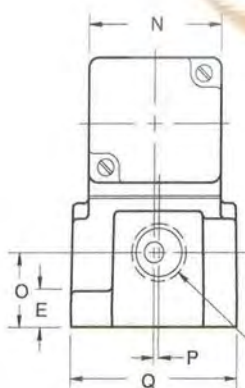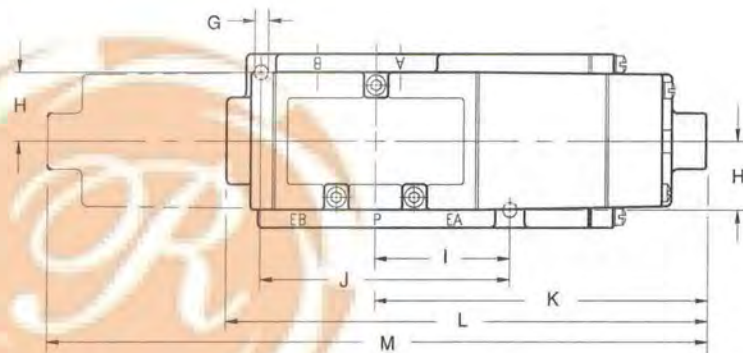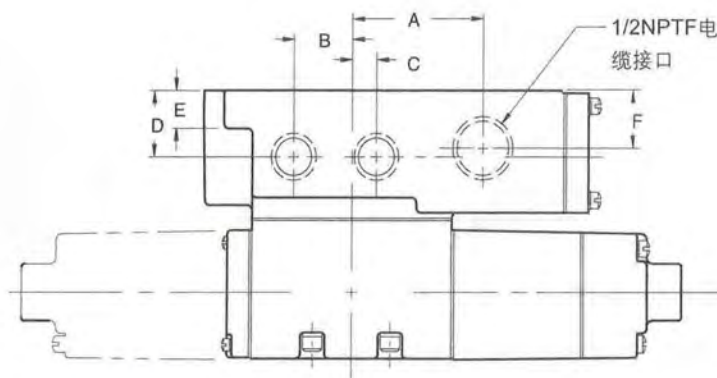

5个1/4或3/8NPTF或G
牙底部接口(任选)

