

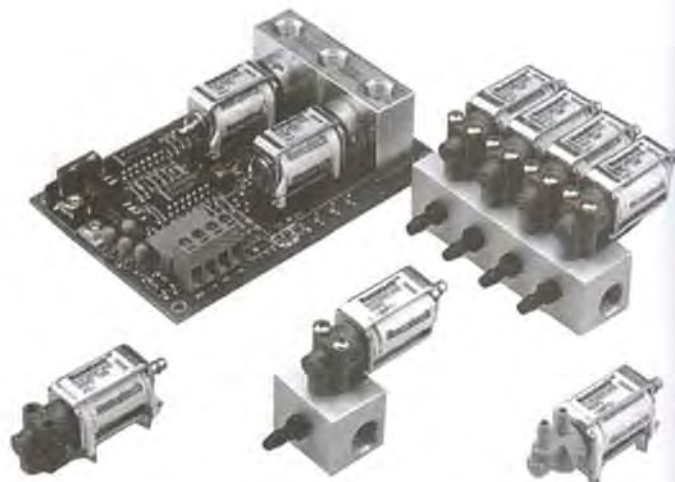


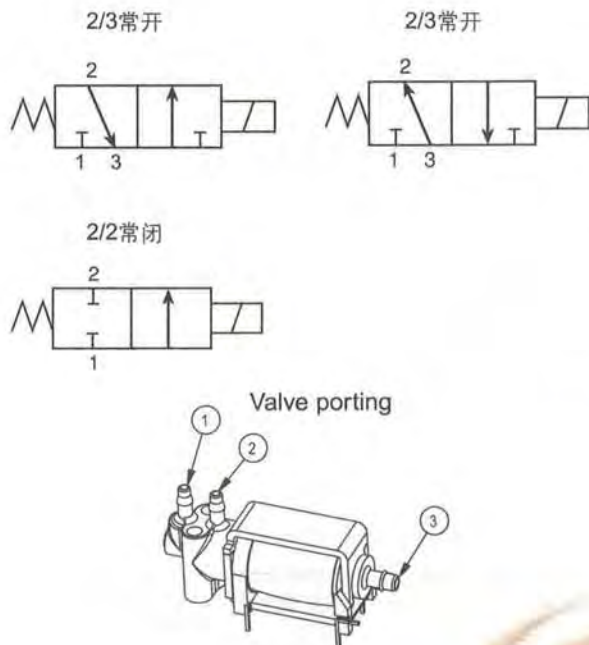

技术参数

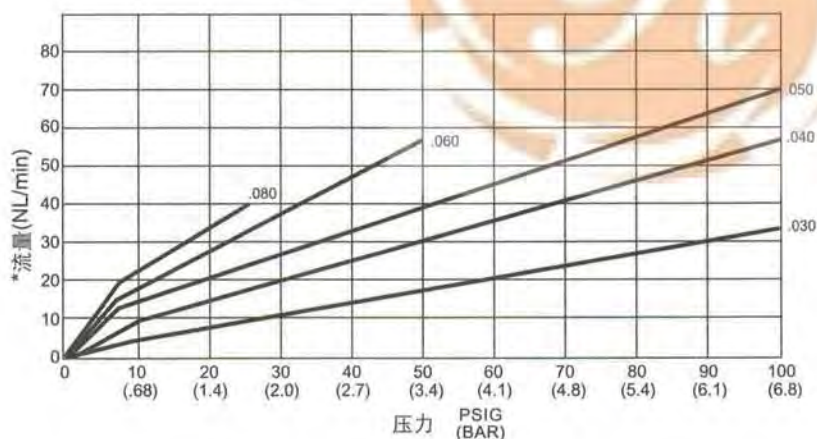

RB系列迷你阀


- 测试寿命可达5亿次
- 最大泄漏量: 0.3 SCCM (泡沫测试)
- 温度范围: -10°F ~ 150°F (-23°C ~ 66°C)
- A级工业线圈
- 全部产品100%出厂检测
- 特富龙隔离导线
- 提供电路板式集装
- 一体化倒钩接头
- 10微米气源过滤要求
- 响应时间<0.010S
- 可用于氧气介质
- 推荐介质为: 干燥空气, 油雾润滑空气, 真空, 无腐蚀, 无毒不易燃干燥气体
- 可根据客户要求集成设计

系列	功率	口径	CV值	最大压力	
				铜	塑料
RB	0.5 Watt	0.030 (0.75)	0.025	50 psi (3.4)	15 psi (1.0)
RB	0.5 Watt	0.040 (1.0)	0.035	50 psi (3.4)	10 psi (0.68)
RB	0.5 Watt	0.050 (1.25)	0.055	25 psi (1.7)	10 psi (0.68)
RB	1.0 Watt	0.030 (0.75)	0.025	100 psi (6.8)	50 psi (3.4)
RB	1.0 Watt	0.040 (1.0)	0.035	50 psi (3.4)	50 psi (3.4)
RB	1.0 Watt	0.050 (1.25)	0.055	50 psi (3.4)	35 psi (2.4)
RB	2.0 Watt	0.030 (0.75)	0.025	100 psi (6.8)	100 psi (6.8)
RB	2.0 Watt	0.040 (1.0)	0.035	100 psi (6.8)	70 psi (4.8)
RB	2.0 Watt	0.050 (1.25)	0.055	100 psi (6.8)	70 psi (4.8)
RB	2.0 Watt	0.060 (1.5)	0.060	50 psi (3.4)	50 psi (3.4)
RB	2.0 Watt	0.080 (2.0)	0.080	25 psi (1.7)	25 psi (1.7)


定货指南




外型尺寸 inch (mm)




贴面汇流板安装型

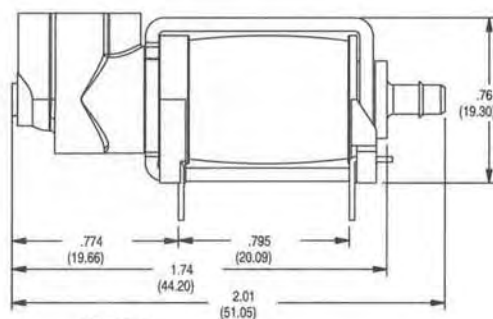


选项 F




倒钩接头安装

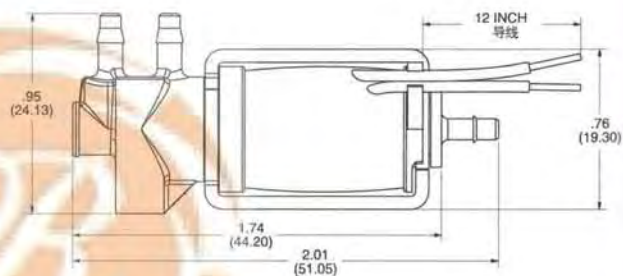

选项 B




铜体，汇流板安装

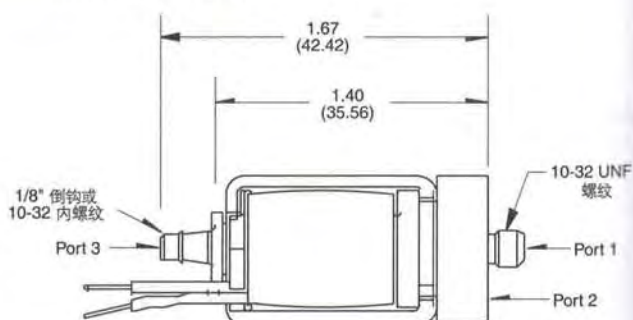

选项 M


M型，汇流板尺寸/型号参考“S”系列选型

直接配管型 inch (mm)

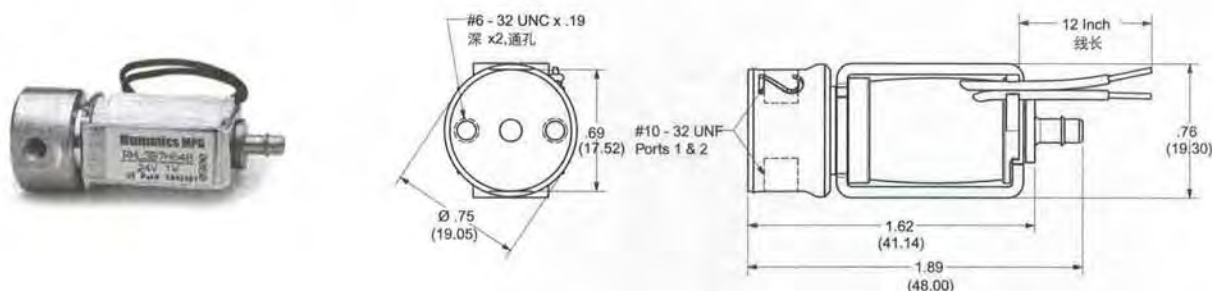

选项 L

贴面安装型汇流板型号, 尺寸 inch (mm)

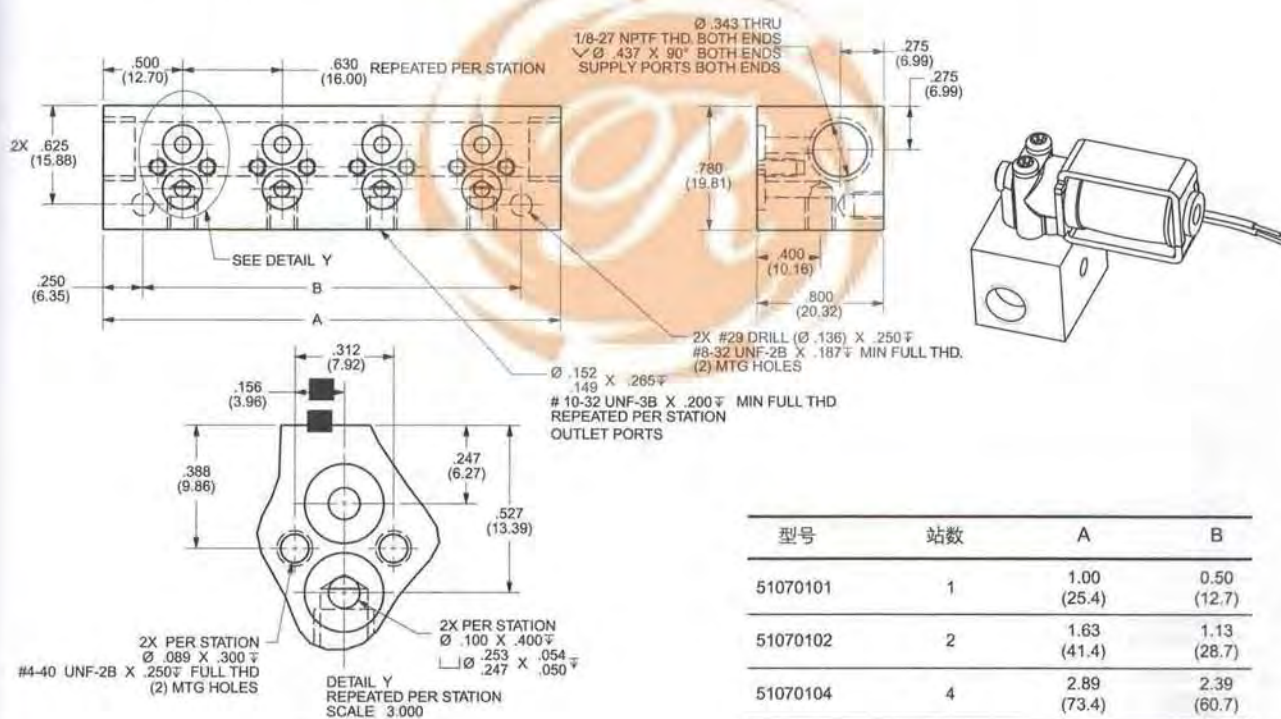

型号	站数	A	B
51070101	1	1.00 (25.4)	0.50 (12.7)
51070102	2	1.63 (41.4)	1.13 (28.7)
51070104	4	2.89 (73.4)	2.39 (60.7)
51070106	6	4.15 (105.4)	3.65 (92.7)
51070108	8	5.41 (137.4)	4.91 (124.7)
51070110	10	6.67 (169.4)	6.17 (156.7)
51070112	12	7.93 (201.4)	7.43 (188.7)